

DRYER INSTALLATION - OD 100, B 250-1

R10



BAMIKO

What items will you need?



- A suitable Masonry drill with a drill bit (8 mm in diameter)
- Spirit level and tape meter
- Marker pen
- 7 x wall fixings 8 x 50 mm – supplied
- 7 x stainless steel screw 5 x 60 mm – supplied

Installation process



1. After selecting a suitable place for installation, place the wall bracket against the wall so that the top edge is 900 mm from the floor, make sure that the bracket is level using the spirit level and mark 6 holes using a marker pen. Drill the holes and fit the wall fixings. Line the wall bracket with the holes, make sure it is level and fix it securely using supplied screws. The top edge of the dryer will be at a height of 108 cm from the floor.

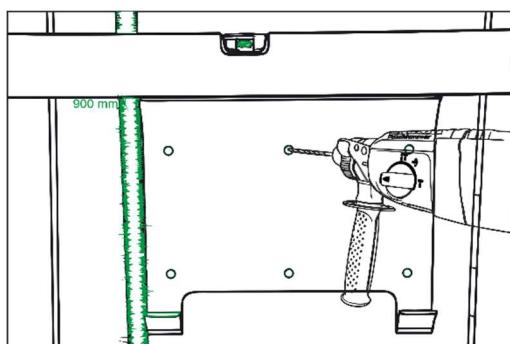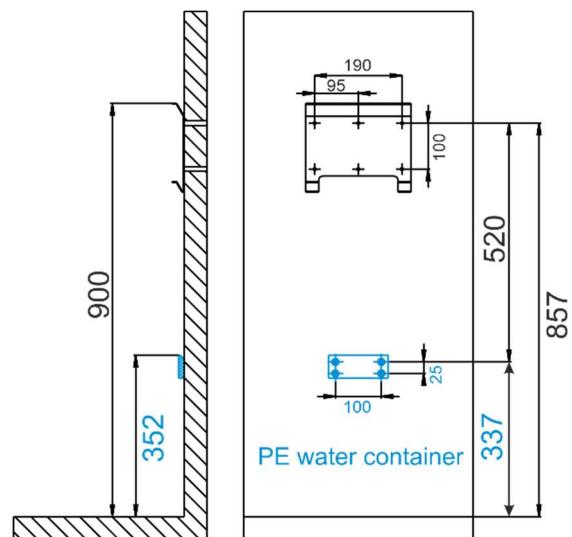

2. Make sure that you removed the transit bar from underneath the product! Without its removal, the dryer will not work correctly!

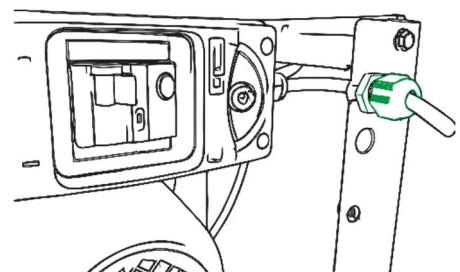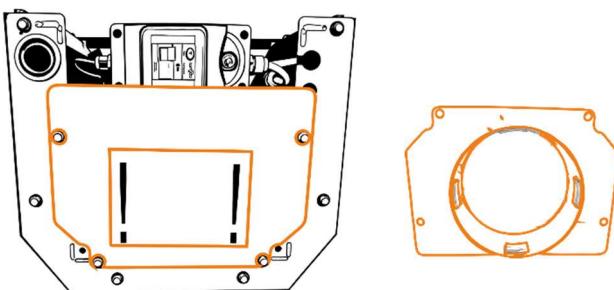

3. Pull out the waste hose entirely by pulling downwards (red arrow) until you see the white mark (green arrow). If you do not see the white mark, the waste hose is not pulled out enough! Operating product without properly pulled out waste hose can lead to a damage to the product! Shorten the drain hose as needed.

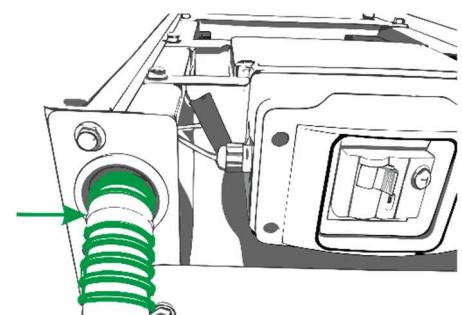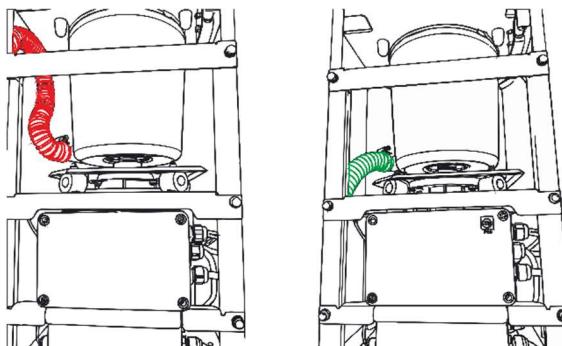


DRYER INSTALLATION - OD 100, B 250-1





R10



4. Install a PROTECTIVE PLATE underneath the dryer using the same bolts from removed transit bar. The protective plate must be always installed when the dryer is in operation.

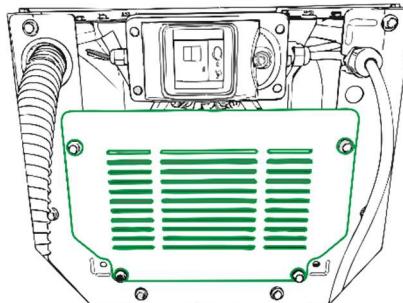

5. Place the dryer onto the wall bracket and push on the top of it so that the dryer sits securely on the bracket. There should be no gap between the product and the wall.
6. Unscrew 2 screws at the bottom side of the dryer and using the same nuts screw them back in with the securing bracket. Mark a hole in the securing bracket onto the wall.
7. Remove the dryer from the wall. Drill one hole, fit the wall fixing, place the dryer back onto the wall bracket, push on the top of it so it sits securely on the bracket and screw the securing bracket using the supplied screw securely to the wall.

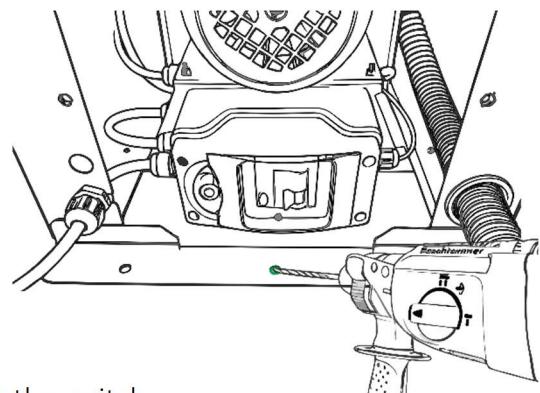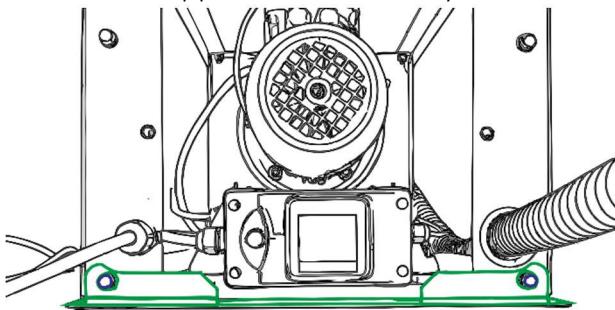

8. The RCCB is in the TRANSPORT MODE, turn it ON by flipping the switch.

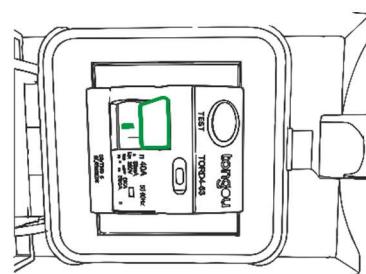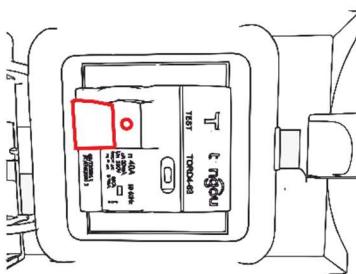

9. Install the operating manual on the wall above the dryer at height of 165 cm.

Electrical connection

⚠ WARNING All electronic connections must be done by a qualified electrician and in accordance with all applicable local electric codes and regulations.

After installation of the product to the wall, connect the dryer to the power socket or directly to the power (L – live wire – brown, N – neutral wire – blue, PE – ground wire – green/yellow).

First use of the product

Before first use of the product, make sure that the inner drum is intact, and that the product was not damaged during installation.

Operate the swimwear dryer according to the operation instructions on the lid and on the wall (see the annex).